# KWK RESISTORS INDIA



## KSMF SERIES - POWER METAL FILM CHIP RESISTORS - SURFACE MOUNT TYPE

The KSMF series is a range of high stability, high reliability, and flame proof packaged power metal film chip resistors. The packaging is resistant to heat & humidity. A wide range of resistance values are available in 1W to 5W. These resistors are specially designed for automatic surface mounting.

#### Features:


- Flameproof UL94V0 molded packaging.
- Automatic Surface Mounting design.
- Very good electrical and mechanical stability.
- Reduced assembly costs.



### **ELECTRICAL SPECIFICATIONS**

| Characteristics   | Condition   | Compliance             |  |  |  |
|---|---|------------------------|--|--|--|
| Tolerance   |   | ±1% & ±5%              |  |  |  |
| Temperature Coefficient   | -55°C to +200°C (As per JIS-C-5202 5.2)   | ±100PPM/°C             |  |  |  |
| Insulation Resistance   | 500V DC -55°C to +200°C (As per JIS-C-5202 5.6)   | >10GΩ                  |  |  |  |
| Change in resistance Short time overload Load Life Moisture Load Life | 5 x rated wattage for 5sec (As per JIS-C-5202 5.5)<br>70°C on-off cycle 1,000hrs (As per JIS-C-5202 7.1)<br>40°C 95% RH on-off cycle 500hrs -55°C to +200°C (As per JIS-C-5202 7.9) | ± 0.5%<br>± 1%<br>± 1% |  |  |  |
| Rate Load   | Rated Voltage for 30 minutes -55°C to +200°C<br>(As per JIS-C-5202 5.4)   | ± 0.5%                 |  |  |  |

## **POWER DERATING CURVE**

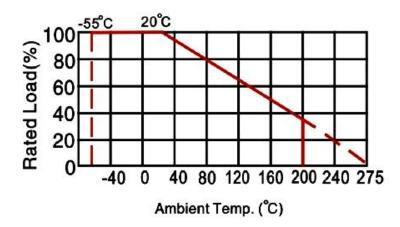


## KWK RESISTORS INDIA



## KSMF SERIES - POWER METAL FILM CHIP RESISTORS - SURFACE MOUNT TYPE

### RESISTANCE RANGE AND DIMENSIONAL DETAILS

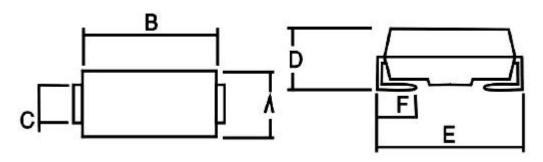

Note: All dimension are in mm.

| Series | Rated Power (W) | Max. Working<br>Voltage (V) | Resistance Range | A ±0.3 | B ±0.3 | C ±0.3 | D ±0.3 | E ±0.3 | F ±0.3 |
|--------|-----------------|-----------------------------|------------------|--------|--------|--------|--------|--------|--------|
| KSMF1  | 1               | 300V                        | 10Ω to 2MΩ       | 3.3    | 4.5    | 1.2    | 2.70   | 6.0    | 1.1    |
| KSMF2  | 2               | 300V                        | 10Ω to 2MΩ       | 4.0    | 6.7    | 1.4    | 3.55   | 7.9    | 1.5    |
| KSMF3  | 3               | 500V                        | 10Ω to 2MΩ       | 5.5    | 10.5   | 1.7    | 5.0    | 12.0   | 2.3    |
| KSMF5  | 5               | 500V                        | 10Ω to 2MΩ       | 7.3    | 13.5   | 1.7    | 6.80   | 17.0   | 2.5    |

## **ORDERING DETAILS**

#### KSMFseries RT

KSMFseries - Series Model #

- Resistance Value (e.g.: 0R1=0.1Ω, 1R2=1.2Ω, 120R=120Ω)

T - Tolerance Code (±1% - F, ±5% -J)

Example: KSMF2 1R J - KSMF2  $1\Omega$  5%

Disclaimer: Product specifications, data and dimensions are subject to change without any prior notice to improve performance, reliability and design.

Please feel free to contact us for any assistance required to choose the right solution. We are also able to design Custom Resistive Solutions.

## KWK Resistors India Pvt. Ltd.

Reg. Office: B-81, Industrial Estate, Rajajinagar, Bengaluru-560044.India Works: #72, 3rd main, 2nd stage, Industrial suburb, Yeshwanthpur, Bengaluru-560022.India Ph.:+91-80-23370038, Tele/Fax:+91-80-23370046 Email: contact@kwk-resistors.in

